



# OCXO 8607 10 times better than any other OCXO

## Oven Controlled Crystal Oscillator

The **8607-B** series is the second generation of OCXO's developed by Oscilloquartz using the technique of housing a state-of-the-art BVA SC-cut crystal resonator and its associated oscillator components in double oven technology. This has resulted in a significant improvement in overall frequency stability corresponding to more than 10 times better performances than any other OCXO's available on the market. The BVA itself consists of an electrodeless, SC-cut, 3rd overtone quartz crystal resonator, decoupled from its mounting structure by four rigid bridges.

This unique design has resulted in substantial features by eliminating:

1. *The perturbing surface contacts between electrodes and resonator*
2. *The contamination problems linked to ion migration in the resonator*
3. *The constraints in the mounting connections*

Based on the production and delivery of more than 10'000 units in BVA technology, the 8607-B features enhanced performances it comes with different versions to suit a wide variety of applications.

Furthermore, the 8607-B BVA quartz crystal oscillator represents an excellent alternative to compact atomic standards.

### Features

- Ultra high long term stability
- Excellent frequency stability over temperature range.
- Ultra low phase noise and outstanding short term stability
- Excellent static "g" sensitivity

### Benefits

- Ideal as a stand-alone reference clock with reduced calibration intervals
- Excellent immunity to temperature gradients
- Ultra-clean signal generation for frequency multiplication
- Reduced effects on phase noise characteristics
- Compatible with CCITT level 2 recommendations and T1X1 Stratum 2 requirements


### Applications

- Synchronization of digital networks and switching equipment
- Frequency distribution systems for satellite ground stations
- Radio navigation and positioning equipment
- GPS and Loran-C receivers
- Atomic fountain, Cesium and Hydrogen atomic frequency standards
- Measuring and calibration equipment
- Frequency synthesizers
- Satellite communications
- Very Long Base Interferometry (VLBI)

### Phase noise (BW = 1 Hz)

Frequencies	5 MHz		10 MHz	
Standard / Option L	Standard	Option L	Standard	Option L
Phase noise 1 Hz	- 125 dBc	- 130 dBc	-118 dBc	- 122 dBc
10 Hz	- 145 dBc	- 145 dBc	-137 dBc	- 137 dBc
100 Hz	- 153 dBc	- 153 dBc	-143 dBc	- 143 dBc
1'000 Hz	- 156 dBc	- 156 dBc	-145 dBc	- 145 dBc
10'000 Hz	- 156 dBc	- 156 dBc	- 145 dBc	- 145 dBc

### Ordering Information

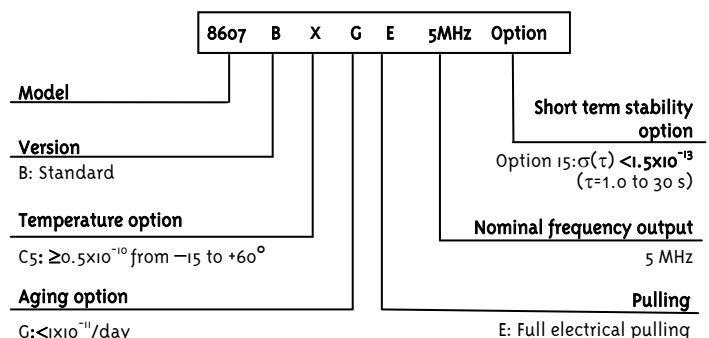


Version	B	Option
	Standard	
Crystal resonator	SC Cut BVA technology	
Standard frequencies	5 MHz	
Optional frequency	10 MHz	
Operating temperature range (X)	-30°C to +60°C	See table
Frequency stability (Δ f/f)		
Long term stability (aging after 30 days of continuous operation)	2x10 <sup>-11</sup> /day 5x10 <sup>-10</sup> /month 4x10 <sup>-9</sup> /year	G: 1x10 <sup>-11</sup> /day H: 5x10 <sup>-12</sup> /day J: 3x10 <sup>-12</sup> /day See table
Over temperature range(γ)	≤ 2x10 <sup>-10</sup> peak to peak	See table
Versus power supply	5x10 <sup>-11</sup> (Vcc ±10%)	
Versus load changes	2x10 <sup>-11</sup> (50Ω ±10%)	
Short term stability σ (τ )	5x10 <sup>-13</sup> (1-30s)	Lower value : see table
g sensitivity	< 5x10 <sup>-10</sup> / g	
Frequency control range	Standard : <b>E</b> Full Electrical	Option : <b>M</b> Mechanical
Fine adjustment option E	>± 1x10 <sup>-7</sup> <± 1.5x10 <sup>-7</sup> by external control voltage 0 to +10 Volts	
Coarse adjustment option M	>± 1x10 <sup>-7</sup> by built-in 10 turn pot. with external control voltage at +5 Volts	
Fine adjustment option M	>± 2x10 <sup>-8</sup> by external control voltage 0 to +10Volts (with built-in potentiometer centered for nominal frequency at +5 Volts)	
Output specifications	On both SMA connectors	
Wave form	Sine	
Level / Impedance	7 dBm ± 1/50Ω	
Phase noise at 5 MHz & 10 MHz (Bw=1Hz)	See table page 1	
Harmonics	< -40 dBc	
Spurious	< -70 dBc	
Power supply		
Input voltage range (DC)	+24V DC ± 10%	
Power consumption	< 3W after warm-up at 25°C, < 10W during warm-up	
Environment		
Storage temperature	-30°C to 85°C	
Vibration	MIL STD 167-1	
Shock	30g, 11ms, 3 shocks in each direction of the main axis	
Size (LxWxH)	138 x 73 x 88 mm	
Weight	900 g	
Outline & electrical connections	See drawing page 4	

Short term stability option	Tau = 1.0 S	Tau = 3.0s — 30s	Option
Sigma Tau < 0.8 x 10 <sup>-13</sup> .(option valid only @ 5 MHz)	1,3 x 10 <sup>-13</sup>	8 x 10 <sup>-14</sup>	Option 08


Short term stability option	Tau = 1.0 S — 30s	Option
Sigma Tau < 2.5 x 10 <sup>-13</sup>	2.5 x 10 <sup>-13</sup>	Option 25
Sigma Tau < 2.0 x 10 <sup>-13</sup>	2.0 x 10 <sup>-13</sup>	Option 20
Sigma Tau < 1.5 x 10 <sup>-13</sup>	1.5 x 10 <sup>-13</sup>	Option 15
Sigma Tau < 1.0 x 10 <sup>-13</sup>	1.0 x 10 <sup>-13</sup>	Option 10

Oscilloquartz SA reserves the right to change all specifications contained herein at any time without prior notice.

**Holdover Autonomy for PRC-traceable Performance, Constant Temperature**

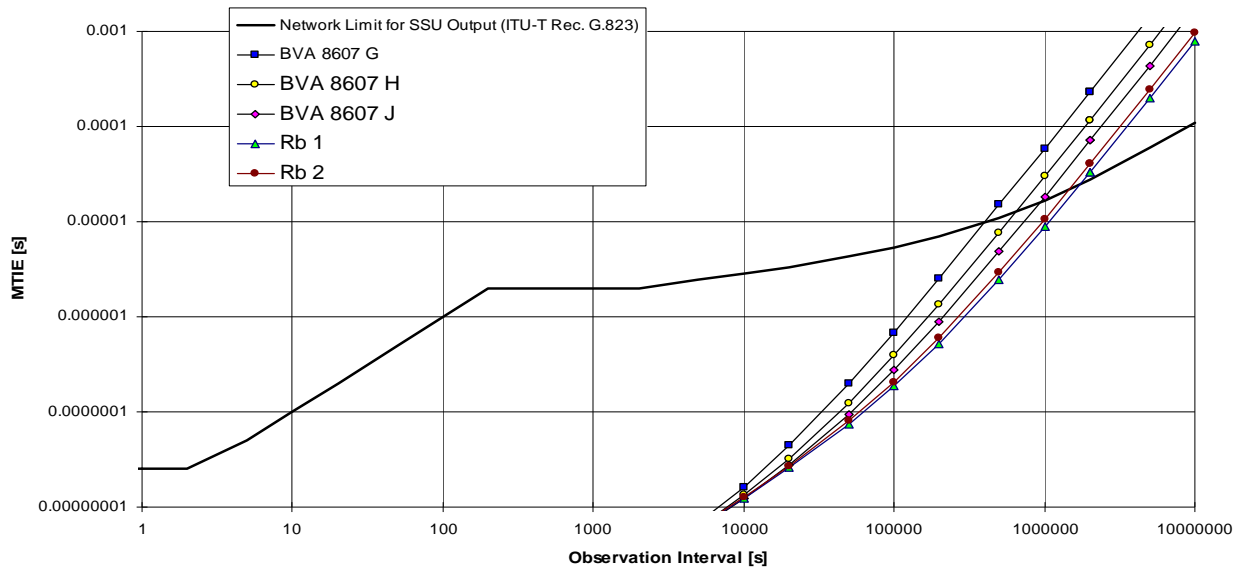

**Holdover Autonomy for PRC-traceable Performance, 10°C Temperature Variation**

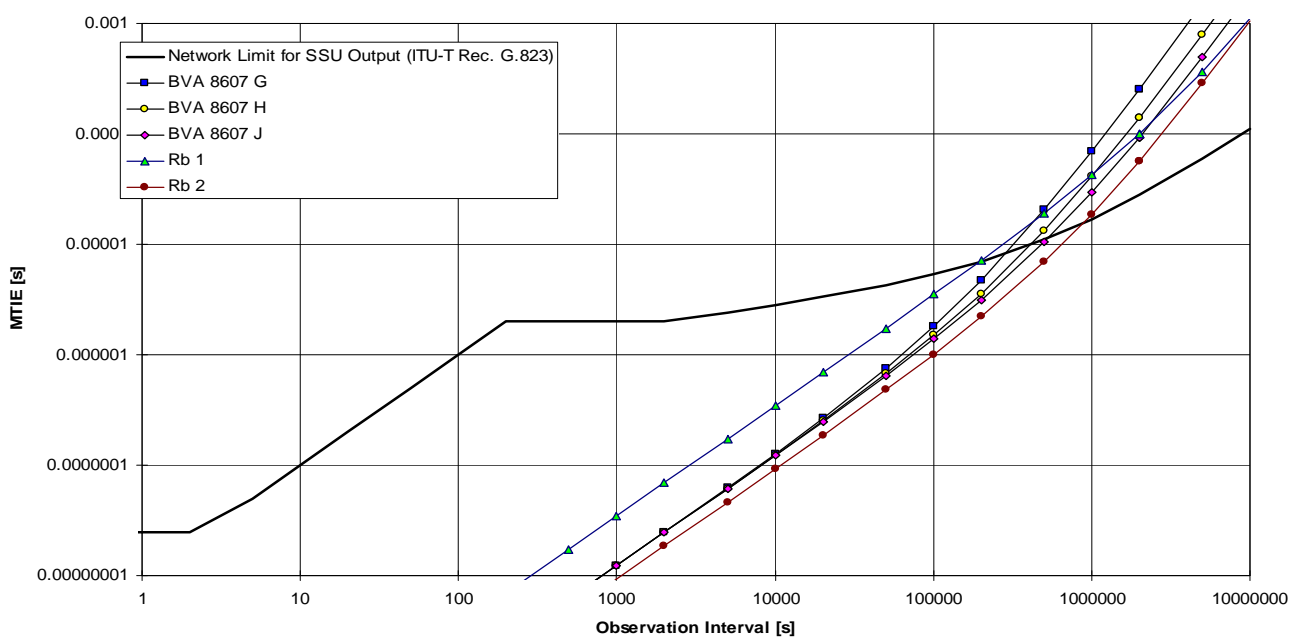

#### Aging

Standard / Option	Standard	Option G	Option H	Option I
Aging per day	$2 \times 10^{-11}$ pp	$1 \times 10^{-11}$ pp	$5 \times 10^{-12}$ pp	$3 \times 10^{-12}$ pp
Aging per year	$4 \times 10^{-9}$ pp	$3 \times 10^{-9}$ pp	$2 \times 10^{-9}$ pp	$1 \times 10^{-9}$ pp
After continuous operation of	30 days	60 days	90 days	90 days

#### Frequency option over temperature range

Frequency option over temperature range	Option
$1 \times 10^{-10}$ peak to peak from $-30^{\circ}\text{C}$ to $+60^{\circ}\text{C}$	Option B1
$1 \times 10^{-10}$ peak to peak from $-15^{\circ}\text{C}$ to $+60^{\circ}\text{C}$	Option C
$0.5 \times 10^{-10}$ peak to peak from $-15^{\circ}\text{C}$ to $+60^{\circ}\text{C}$	Option C5

#### Outline and electrical connections (all dimensions in mm & inches)

#### SMA connectors

J1 : = 7 dBm /  $50 \Omega$

J2 : = 7 dBm /  $50 \Omega$

#### SUB D connector

J3/1 : Thermistor

J3/2 : 0V (GND)

J3/3 : Ground

J3/4 : CCW pot.


J3/5 : Vc input

J3/6 : Thermistor

J3/7 : + 24 V

J3/8 : NC

J3/9 : CW pot

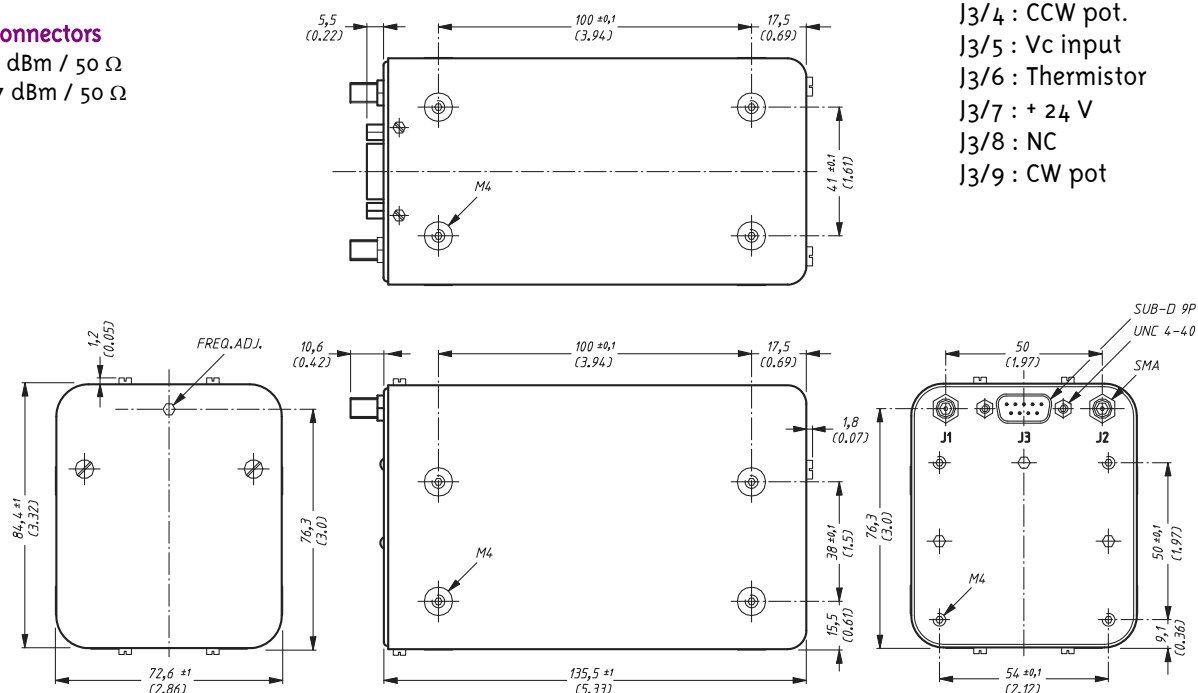

Oscilloquartz SA reserves the right to change all specifications contained herein at any time without prior notice.



A COMPANY OF THE MINIMATCH GROUP